

000255. Apple Pincushion




Material (per item)

- Universal pen holder (CAUNIPHL1)
- Erasable pen (With dark-colored fabric: Erasable pen for dark-colored fabric)
- High tack adhesive fabric support sheet (CASTBL2)
- Fabric – 4 kinds
- Felt (green and brown) – 2 kinds
- Cardstock – 1 kind
- Cotton batting (fiberfill)
- Craft adhesive
- Sewing machine thread
- Sewing machine
- Iron
- Sewing Scissors
- Sewing needle
- Pins
- Awl (or pin)


(1) Attach the high tack adhesive fabric support sheet to the standard mat. (For details on attaching the sheet, refer to the instructions included with it.) With the wrong side of the fabric facing up, attach it to the support sheet.

(2) Insert the erasable pen into the optional universal pen holder, and then draw patterns A-1 and A-2. When drawing on dark-colored fabric, use the erasable pen for dark-colored fabric. Afterward, install the standard cut blade holder, and then cut out the patterns.


Fabric A (wrong side)

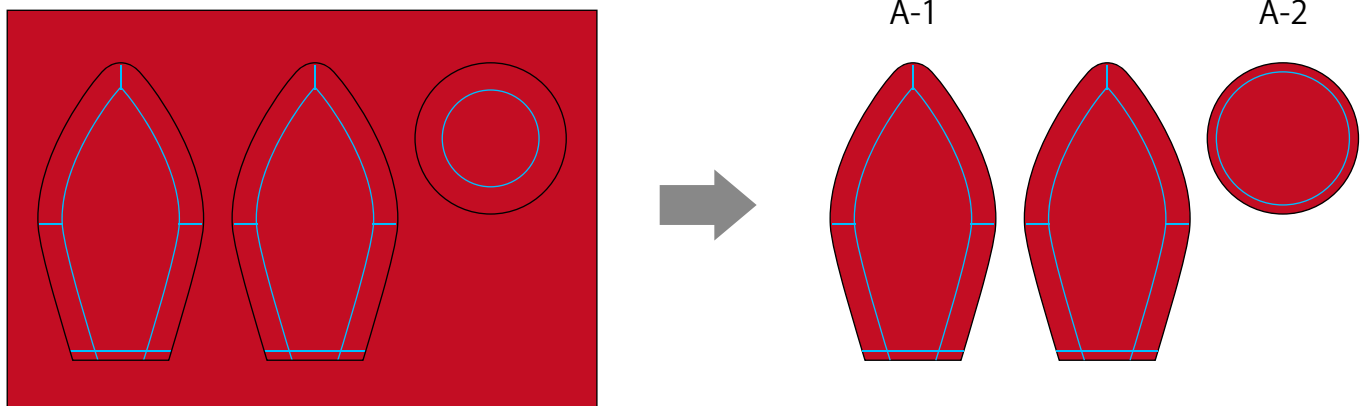


(3) In the same way, draw the B patterns, and then cut them out.

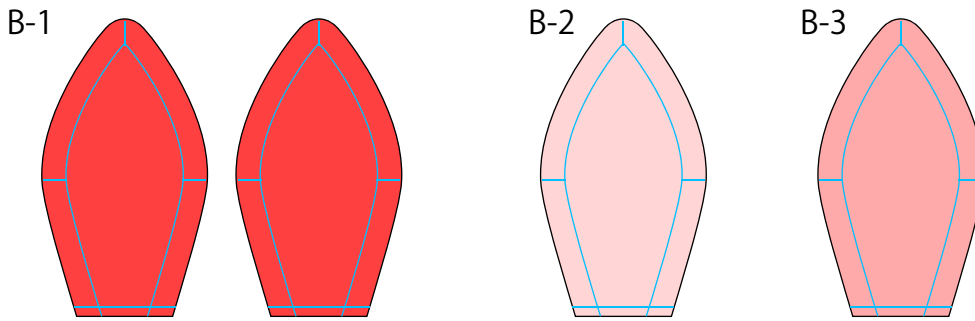


(4) Attach the felt to the mat prepared in step (1), and then cut out C.

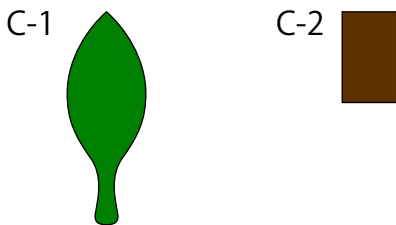


(5) Cut D from cardstock.




(6) Arrange parts A and B (right sides out) as shown below, and then sew them together according to the instructions in steps (7) and (8).

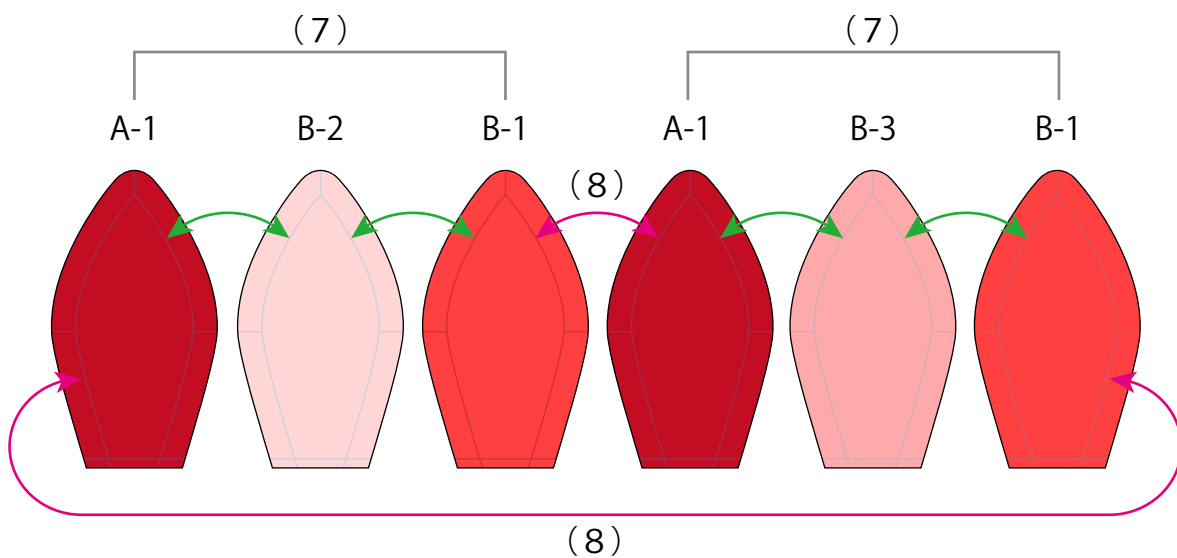


(7) With their right sides together, sew together A-1 and B-2, as shown below. Then, with their right sides together, sew B-1 to B-2. In the same way, sew the remaining three parts together to create two pieces.

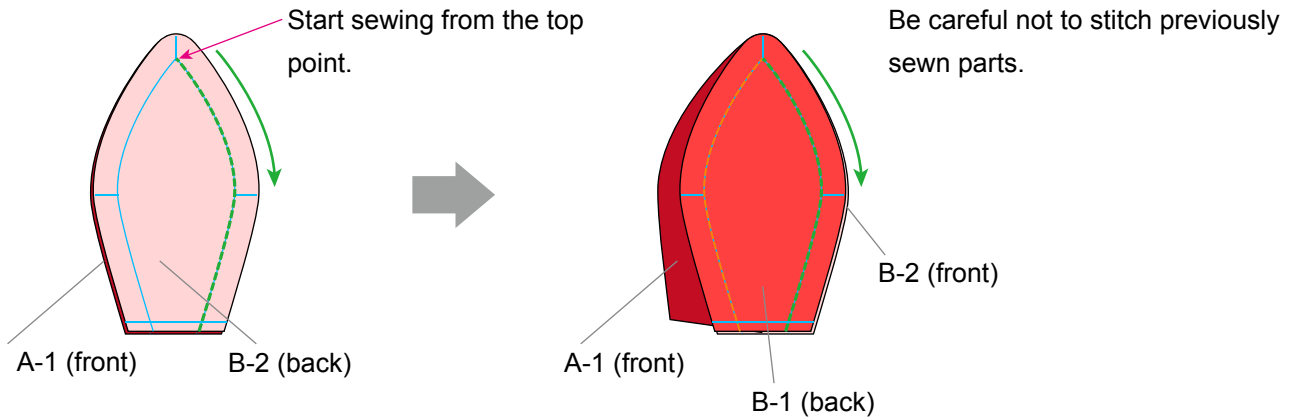


(8) With their right sides together, sew together the two sets assembled in step (7). Make cuts in the seam allowance along the curves, and then turn right side out through the opening.

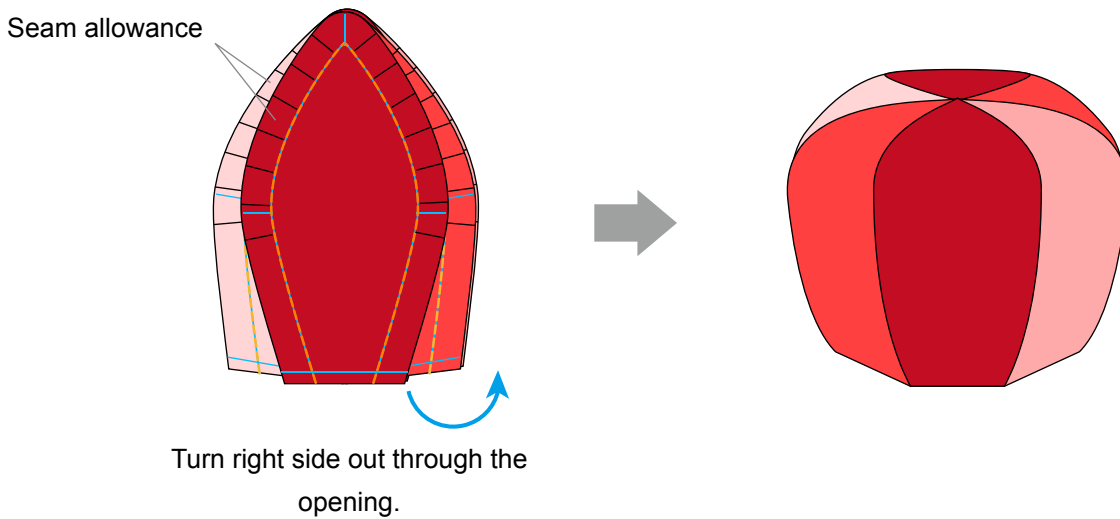


(9) Sew a line of stitching along the opening, 3 mm (0.1") in from the edge, as shown below. Stuff with fiberfill, and then pull the thread ends to tighten the opening.

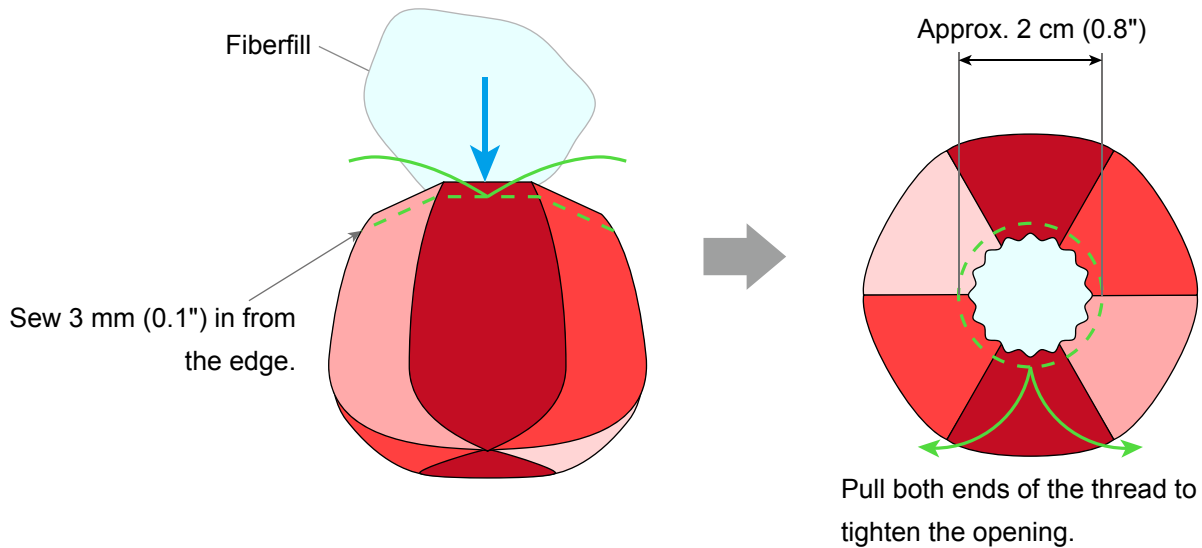


(10) Sew a line of stitching 3 mm (0.1") in from the edge of A-2. Place D at the center, pull the thread ends to tighten the opening, and then touch up with an iron before removing D.

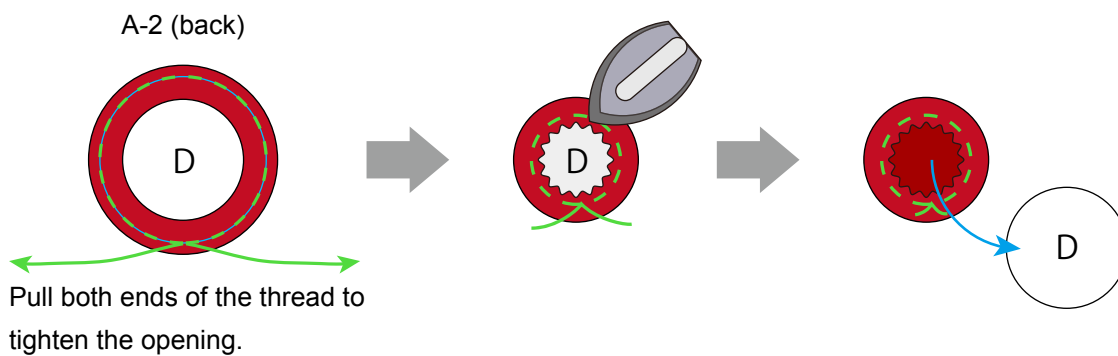

(11) Place the piece assembled in step (10) over the opening of the piece assembled in step (9), and then sew them together with fine slip stitches, as shown below.

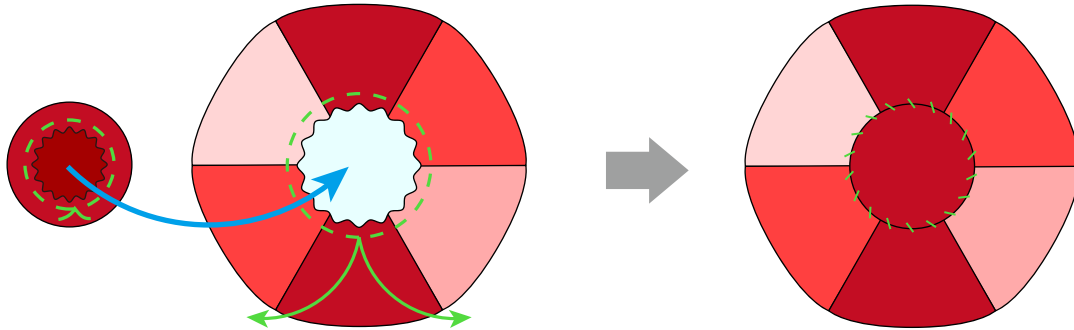

(12) Lightly apply craft adhesive to the back of C-2, and then roll it to form a rod.

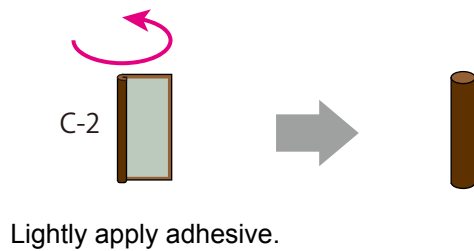

(13) With the awl (or pin), punch a hole at the intersection of the stitching in the piece assembled in step (11), insert C-1 and C-2, and then glue them with craft adhesive, as shown below.

