

000319. Rhinestone Bat Cap





Material

- Rhinestone Starter Kit (CARSKIT1)
- Iron-on fabric appliqué contact sheet (CASTBL1)
- Hot fix rhinestones (SS10, black diamond) – 135
- Hot fix rhinestones (SS20, sun orange) – 2
- Felt (black) – 1 kind
- Cap (solid black) – 1
- Iron
- Press cloth
- Craft adhesive, or sewing needle and thread (black)

(1) Attach the iron-on fabric appliqué contact sheet to the felt. (For details on attaching the sheet, refer to the instructions included with it.) With the felt side facing up, attach it to the mat, and then cut out A.

Felt

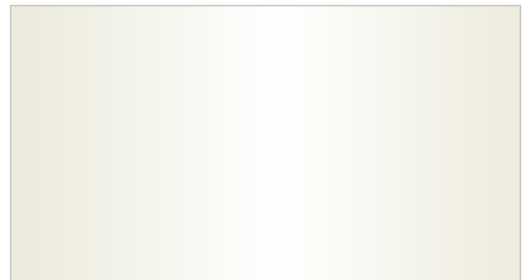




Since the backing paper of the iron-on fabric appliqué contact sheet will be used later, do not throw it away.




(2) Attach the template sheet (included with the Rhinestone Starter Kit) to the standard mat, and then cut out B. (For details, refer to the instructions included with the kit.)



(3) Attach the template sheet from step (2) to the backing board included with the kit, and then arrange rhinestones in the holes in the sheet. Place the transfer sheet on top to transfer the rhinestones. (For details, refer to the instructions included with the kit.)

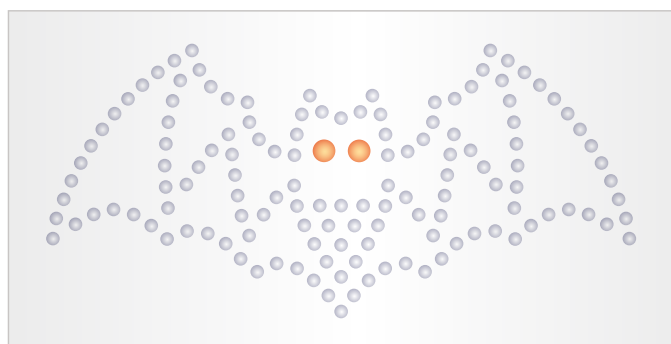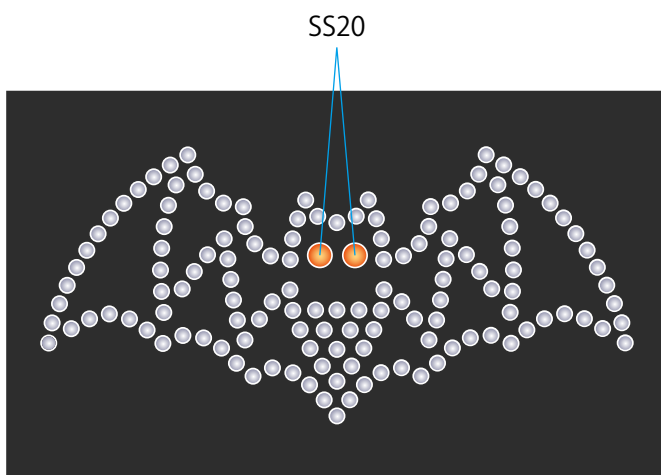

(4) Stack the backing paper for the iron-on fabric appliqué contact sheet, A and the piece from step (3), in that order from the bottom, and then place the press cloth on top and iron on the rhinestones. (For details on attaching rhinestones, refer to the instructions included with the kit.)

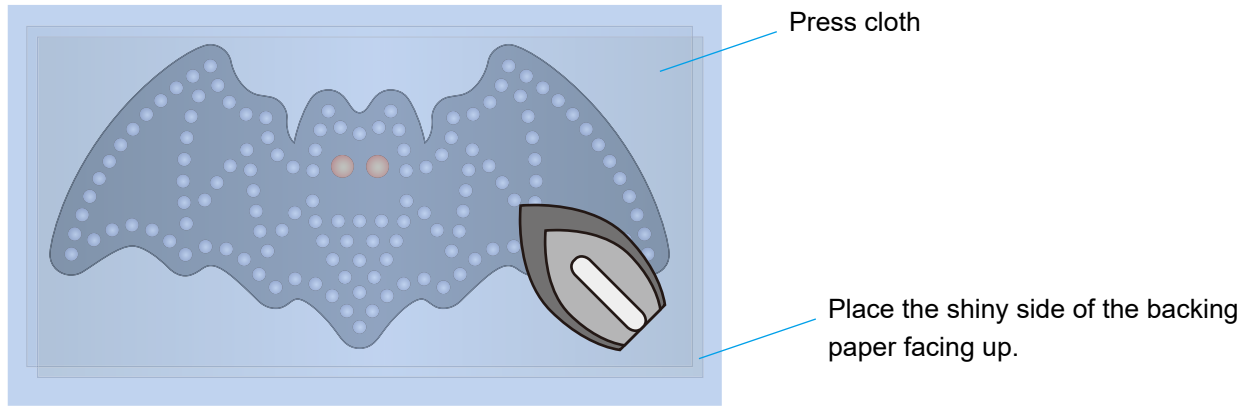

(5) Position the piece from step (4) on the front of the cap. Attach it with adhesive or sew it in place.

